

For both emergency and general purpose broadcast
Zone selection or all call
PC-programmable system software
permits desired functions to be assigned to individual function keys (equipped with 2 LED indicators)
AUX Input for
BGM distribution



Order no: RM-300X


Specifications

Power source	24 V DC (Operation range: 15 - 40 V DC)
Frequency response	100 Hz - 20 kHz
Distortion	< 1 %
Current consumption	240,0 mA
S/N ratio	60 dB
Audio output	0 dBV, 600 Ω, balanced
Controls	Microphone volume control, Monitor speaker volume control
Key extension	7
Weight	0,8 kg
Dimensions (W x H x D)	190 x 76,5 x 215 mm
Dimensions (ø x D)	x 215 mm
Gross weight	1,3 kg
Finish	ABS resin, black

RM-300X

VOIR REF RM-300X C01

Appearance

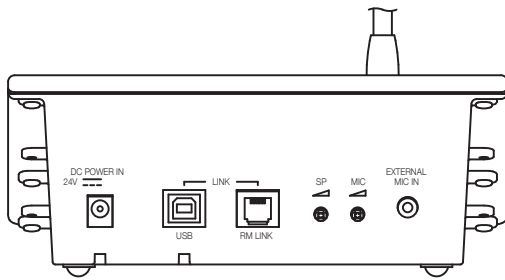

Rear View


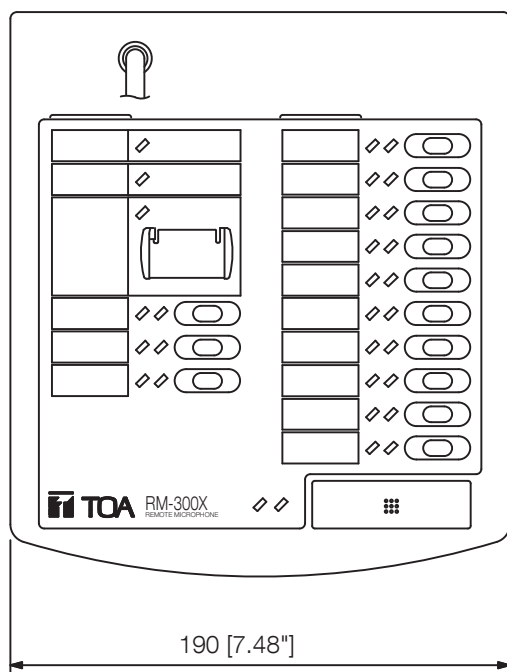


Figure as viewed
from point A

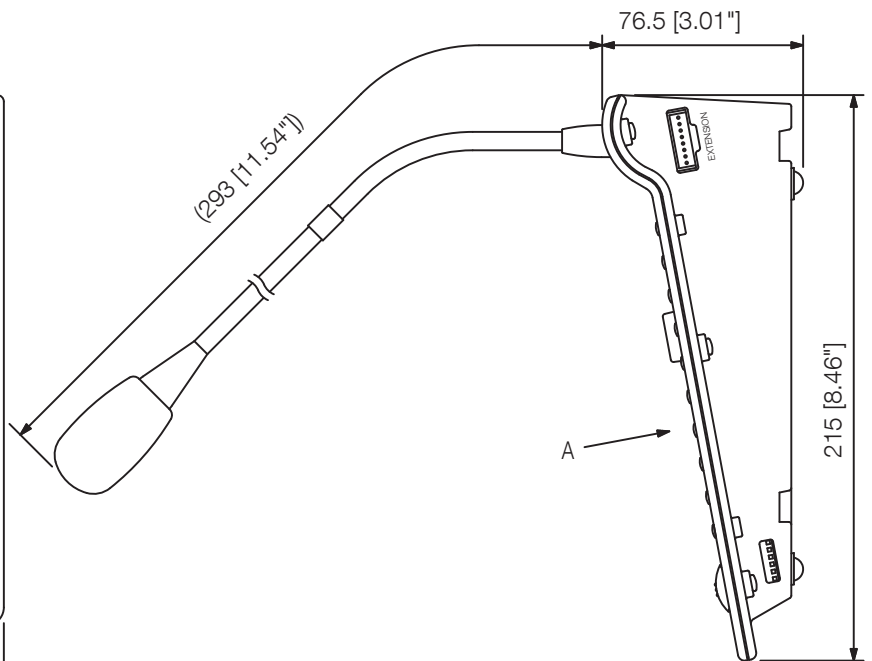

Side View

UNIT:mm

SCALE:1/3

Note: Numerical values in parentheses are for reference only.