

# 4 WAY SPLITTER UNIT

## Emergency Voice Communication System


The 4 way splitter unit allows up to 4 stand alone disabled toilets to be monitored in one specific area.

Staff can then at the designated area such as a reception or security desk react to an alarm swiftly and efficiently.

### 4 WAY SPLITTER UNIT FEATURES

- Designed to comply with all regulations and recommendations
- High visibility
- More than one 4 way splitter can be used
- Small compact design
- Up to 4 disabled toilets monitored in one area
- Uses blue LEDs to avoid confusion
- Visibility to remote staffed areas
- No mains or Power
- Supply Unit (PSU) required at each disabled toilet

### TYPICAL EMERGENCY ALARM ASSIST SYSTEM USING A 4 WAY SPLITTER

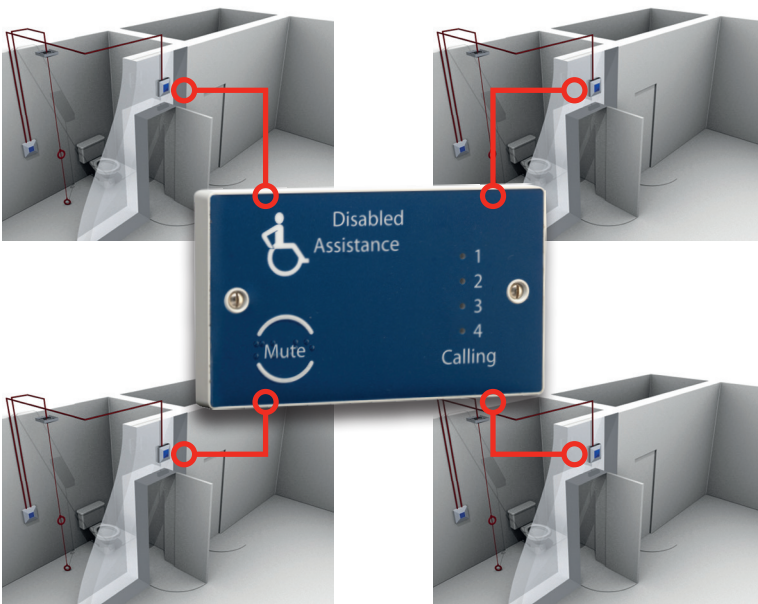

# 4 WAY SPITTER UNIT TECHNICAL SPECIFICATION

## POWER SUPPLY UNIT SPECIFICATION

Dimensions (W x H X D) 146 mm x 86 mm x 39 mm

### ELECTRICAL SPECIFICATION

Mains 230V ac +10% -15%

Output 12V dc (nominal)

### PHYSICAL

Construction Flame retardant Polycarbonate

## 4 WAY SPLITTER UNIT

Dimensions (W x H X D) 146 mm x 86 mm x 39 mm

### PHYSICAL

Construction Flame retardant Polycarbonate



## ORDER CODES

DESCRIPTION	ORDER CODE
4 Way Splitter Emergency Assist	EVCS-TASP4
PSU for use with 4 Way Splitter Emergency Assist	EVCS-TASP4-P

### For more information

Contact your Business Manager

### Honeywell

140 Waterside Road  
Hamilton Industrial Park  
Leicester, LE5 1TN  
Tel: +44 (0) 203 409 1779

4WAYUNIT01 | 08/19  
© 2019 Honeywell International Inc.

**Honeywell**